PIT & QUARRY

November, 1979

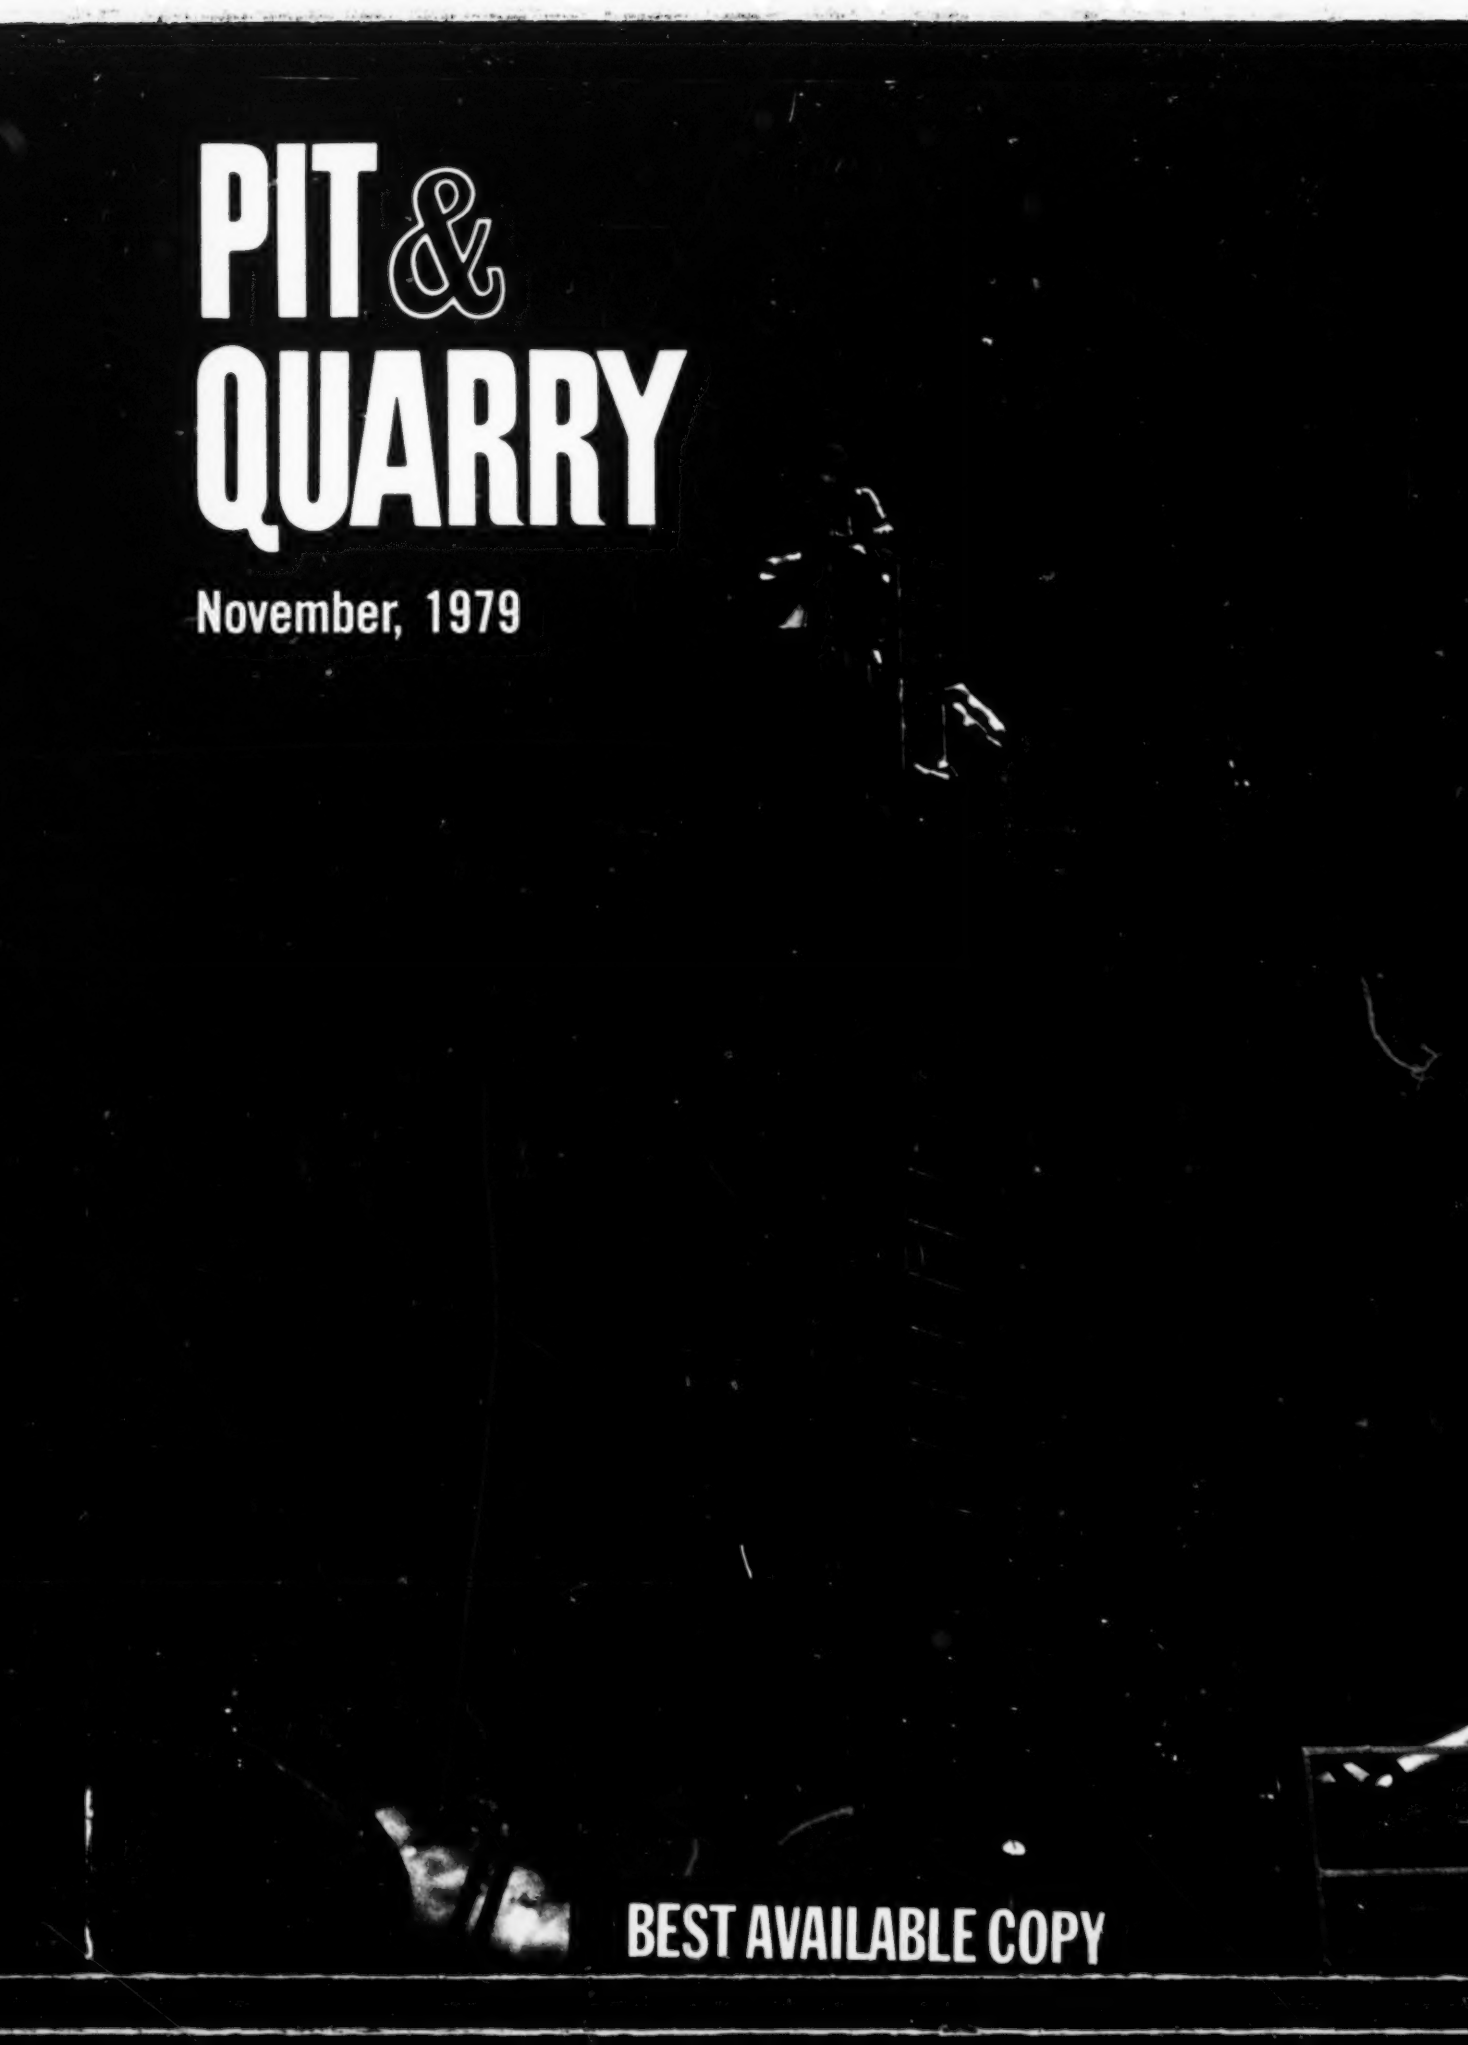

BEST AVAILABLE COPY

ON THIS MONTH'S COVER



Adding to crushing knowledge in a unique way. See p. 48. Photo by Jack Gordon Creative Services.

The National Scene	7
Industry Personals	11
Industry News	17
Coming Events	20
Screenings	31
Truck Topics	33
Useful Literature	91
Manufacturers' News	105
Readers' Service Card	113
New Equipment	115
Classified Ads	119
Advertising Sales Offices	129
Advertisers' Index	130

Executive and Editorial Offices: 105 W. Adams St., Chicago, Illinois 60603. Phone (312) 726-7151.

PIT & QUARRY is published monthly.

Copyright 1979 by Pit & Quarry Publications, Inc.

Controlled circulation postage paid at Pontiac, Illinois 61764 and Chicago, Illinois 60607. In changing address, please give old as well as new address.

Subscription prices: U.S., U.S. Poss. and Canada, 1 Year $14; 2 Years, $21. All other countries, 1 Year, $45; 2 Years, $65. Single copies: $2.00 each to U.S., U.S. Poss. and Canada, All other countries, $4.00 each.

Member of:
American Business Press, Inc.
Business Publications Audit of Circulation, Inc.
Associated Equipment Distributors

Pit & Quarry is indexed by Engineering Index, Inc.

Copies of back issues are available on microfilm from Xerox University Microfilms, 300 N. Zeeb Road, Ann Arbor, Michigan 48106.

INTERNATIONAL STANDARD SERIAL NUMBER: ISSN 0032-0293 (registered in National Serials Data Program, Library of Congress, Washington, D.C. 20540)

Postmaster: Please send form 3579 to Pit & Quarry Publications, Inc., 105 W. Adams St., Chicago, Illinois 60603

ABP VBPA

PIT & QUARRY

ISSN 0032-0293

The basic magazine in a basic industry

PRICE Two dollars

CONTENTS/NOVEMBER 1979 VOL. 72 No. 5

EDITORIAL

47 THE CONTROVERSIAL EPA ..... Sandy Herod

PLANTS

56 COMPUTER-PLOTTED ISOPACH MAPS GUIDE SAND & GRAVEL OPERATIONS ..... Sid Levine
Blount, Inc.'s new 1200-tph Michigan aggregate plant uses triple surge-pile design

82 BLUEGRASS-COUNTRY PLANT PROCESSES STONE FOR HIGHWAYS, READY MIX, AGLIME ..... Sid Levine

OPERATING & TECHNICAL

48 CRUSHER ACTION ANALYZED WITH HIGH SPEED PHOTOGRAPHY ..... Sandy Herod
Unique study aimed at product improvement

73 CEMENT RAW MATERIALS AND RAW MIXES: PART II ..... Dr. A. K. Chatterjee
A review of diagnostic interrelations: the physicochemical characteristics of raw materials and the reactivity of raw mixes

98 AERIAL ROPEWAYS—ALL TERRAIN TRANSPORT
Taiwan cement firm moves 450 tph of stone from quarry to plant

100 QUARRY EQUIPMENT RELIABILITY ASSURES CEMENT PLANT FEED
Gifford-Hill quarrying involves ripper/dozers

BLASTING

66 FACTORS AFFECTING BLASTING OPERATIONS PART I ..... Clark Davenport
Knowledge of geology and explosives critical to proper blasting procedures

ENVIRONMENTAL

94 NUISANCE AND FUGITIVE DUST IN A CEMENT PLANT ..... Charles L. Walker
A guide to dust collection planning

ASSOCIATION

88 NCSA'S OPERATIONS DIVISION DRAWS RECORD ATTENDANCE ..... Sandy Herod
Committees lay groundwork for 1980 convention sessions

mation of the joint venture is subject to the execution and delivery of a definite agreement and to approval by the management and boards of directors of both companies.

With production start up tentatively projected for early 1982, the mine would yield an estimated three to four million tons of phosphate rock per year, when operating at full capacity.

"You'll start work in Department 2B, Mr. Karns, just ask anyone where 'the hole' is."

COMPARISON OF MONTHLY/YEAR-AGO CONSTRUCTION CONTRACT VALUES*

	1979 Aug. (000)	1978 Aug. (000)	% Change
Nonresidential Building	$ 4,514,840	$ 4,099,532	+10%
Residential Building	6,986,895	7,120,408	− 2
Nonbuilding Construction	2,888,803	4,802,404	−40
Total Construction	$14,390,538	$16,022,344	−10%

	1979 8 mos. (000)	1978 8 mos. (000)	% Change
Nonresidential Building	$33,608,487	$29,386,119	+14%
Residential Building	52,601,135	50,667,518	+ 4
Nonbuilding Construction	29,128,101	28,640,197	+ 2
Total Construction	$115,337,723	$108,693,834	+ 6%

DODGE INDEX
(1972 = 100, seasonally adjusted)

June, 1979 ..... 177 July, 1979 ..... 165 August, 1979..... 163

**Based on statistics compiled by the F. W. Dodge Div., McGraw-Hill Information Systems Co.*

CIMA Publications Catalog Available

The Construction Industry Manufacturers Association has published a reference guide to safety publications and other materials on earthmoving, construction and mining machines. The new catalog describes the safety, training, technical and other informational materials available from CIMA.

The 12-page catalog contains a price listing on eight operator safety manuals, slide presentations, job-site safety posters, and other booklets. For a copy of the new catalog write CIMA, 111 East Wisconsin Ave., Milwaukee, Wis. 53202.

Check us out!

Unique LR 350 Limberoller idler has a long list of outstanding advantages.

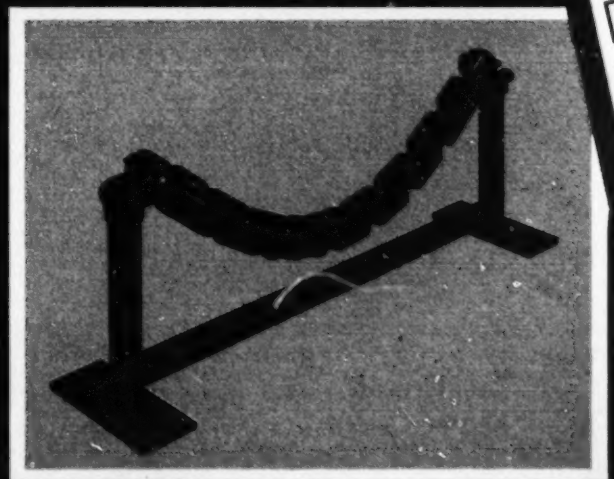

- Waffle-pattern design keeps cleaning itself and conveyor belt.
- Special non-corroding, heat-resistant elastomer resists abrasion and wear.
- Superior vulcanized bond between elastomer roller and steel cable guards against cable corrosion.
- Unique design provides stronger rope support, minimizes cable fatique . . . maximizes roller life.
- Catenary shape provides maximum belt support, absorbs heavy shock loads.
- Uniform contact between idler and belt assures good belt alignment, reduces belt wear.

For more information and prices ask your Joy distributor or contact Joy Manufacturing Company, Conveyor Products, LaGrange, N.C. 28551. Phone (919) 566-3014.

Offices and plants throughout the world

LA GRANGE DIVISION

JOY

Circle 15 on card, page 113